

SELECTED CROSS-SECTIONS


searche for more on [amex-baczek.com](https://amex-baczek.com)



TRADE PARTNER FOR BUSINESS.


G-LINEAR 74

f in @ | amex-baczek.com

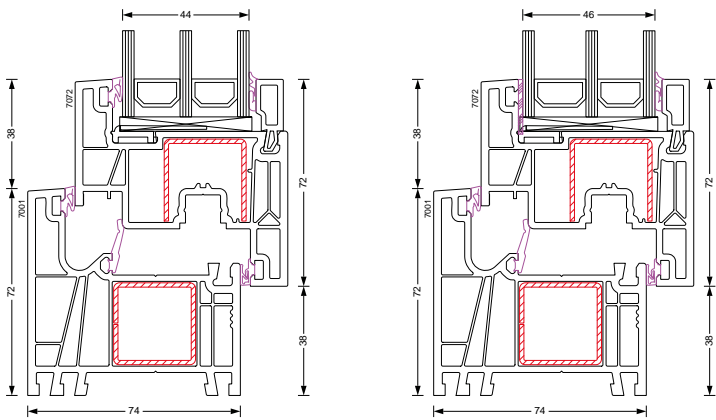

STANDARD WINDOW


STANDARD WINDOW WITH STV<sup>+</sup>

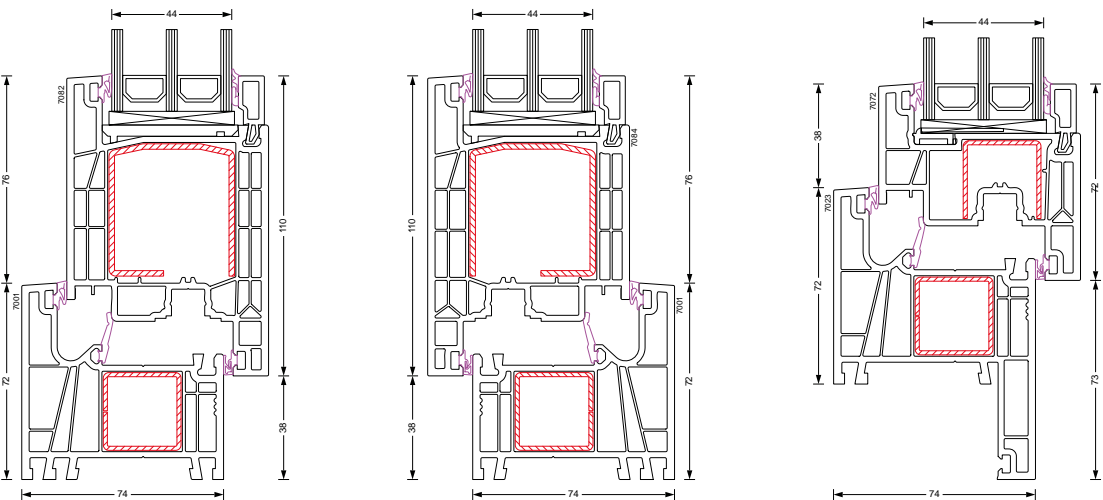

BALCONY DOOR (INWARD OPENING) / PSK

BALCONY DOOR (OUTWARD OPENING)

RENOVATION WINDOW (35 MM)

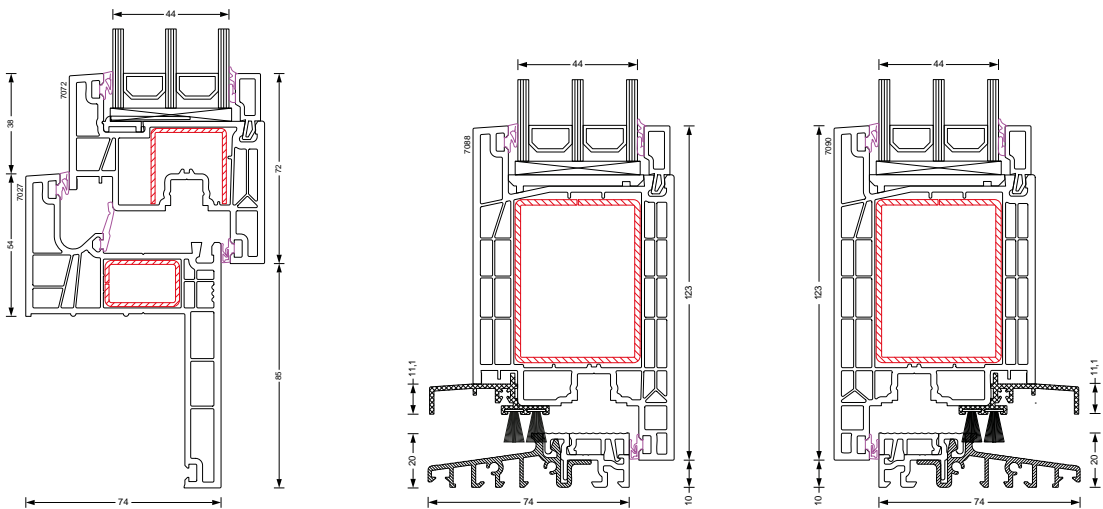

RENOVATION WINDOW (65 MM)

DOOR (INWARD OPENING)

DOOR (OUTWARD OPENING)

SETS  
NEW STANDARDS



„AMEX-BĄCZEK” SP. Z O. O. SP. K.  
Falknowo 13, 14-240 Susz  
tel. +48 89 648 69 03  
[contact@amex-baczek.com](mailto:contact@amex-baczek.com)  
[amex-baczek.com](https://amex-baczek.com)  
NIP 744 14 85 088 REGON 510815144

The information included in this leaflet is for information purposes only. Before purchasing a product, the specification should be verified with the manufacturer or sales representative.

THE SYSTEM PROVIDES GEALAN

THE FITTINGS PROVIDES SIEGENIA  
brings spaces to life








# G-LINEAR 74



PROFILE: 7001 - 7072    COLOR: white    core: white

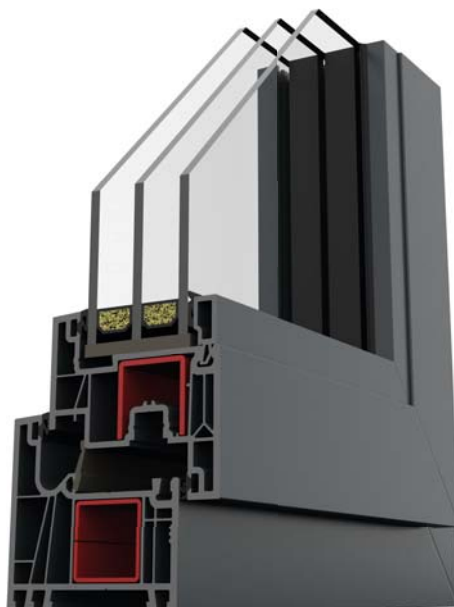

PROFILE: 7001 - 7072    COLOR: anthracite    CORE: grey

AVAILABLE IN  
STV® TECHNOLOGY

AVAILABLE  
CORE COLORS:

- white
- brown
- caramel
- grey

74  
mm

PROFILE  
DEPTH

6

CHAMBERS  
(IN FRAME)

3

NUMBER OF  
GASKETS

44  
mm

GLAZING  
PACKAGE

5


CHAMBERS  
(IN SASH)

0,76  
W/m²K\*


U<sub>w</sub>  
COEFFICIENT

\* the U<sub>w</sub> coefficient calculated by the calculation method for the reference white window with parameters: dimension: 1230 x 1480 mm; window pane package: 4/20/4/16/4 + CRT Swisspace Ultimate U<sub>g</sub> = 0.5 W/m²K; for the STV® technology

## POSSIBILITIES OF IMPLEMENTATION



STANDARD  
WINDOWS



RENOVATION  
WINDOWS



OBLIQUE, TRAPEZOIDAL  
WINDOWS




ARCHED, OVAL  
WINDOWS



BALCONY  
DOORS




EXTERNAL  
DOORS



PSK PATIO  
DOORS

## REALWOOD VENEERS


Realwood veneers perfectly image genuine wood grain. They are significantly less glossy than standard veneers. As a result, they give G-LINEAR 74 windows a fresh and natural look.




7016



9010



ginger oak



honey oak




weissbach oak




turner oak malt

## STANDARD VENEERS


+ more than 50 colors in the non-standard palette




walnut




golden oak




mahogany



anthracite grey




rustic oak




swamp oak




anthracite grey smooth



mountain pine



light oak



chocolate brown



creamy white RAL 9001



silver RAL 7001



winchester

The actual colours may differ from the printed ones. Window profiles can be covered with foil, lacquered or colored in mass. For full colour palette ask our sales representatives or visit amex-baczek.com.

## EXAMPLE OF COLORS AND HANDLE TYPES

Medos



DE LUXE



F1  
(sandblasted)



F3  
(brushed)



F4  
(brushed)



F9005  
(brushed)



INOX



F9  
(sandblasted)



gold



RAL 7016



F3  
(sandblasted)



F4  
(sandblasted)

HOPPE  
ATLANTA



F8707



F9



F9016



F1



F4

For details regarding colors ask the PVC Commercial Department at Amex-Bączek or our Trading Partners.

## HANDLES TYPES



For the G-LINEAR 74 window system we offer the Medos DUBLIN or HOPPE Atlanta handles in the Secustik® technology. We offer standard handles and handles with keys or buttons.

### THE COLORS OF HANDLES Medos


- › F1 (s) (b)
- › F3 (s) (b)
- › F4 (s) (b)
- › F9005 (s) (b)
- › F9 (s) (b)
- › gold
- › inox (b)
- › RAL 7016
- › RAL 8019
- › RAL 8077
- › RAL 9001
- › RAL 9005
- › RAL 9016
- › silver

(s) - sandblasted (b) - brushed


### THE COLORS OF HANDLES HOPPE

- › F9016
- › F8707
- › F1
- › F4
- › F9


Our windows have Siegenia TITAN AF fittings. Even if it is standard version, they guarantee a high level of safety. Additional anti-burglary protection is provided - in combination with a rotary mushroom head cam - by a special burglary resistant hitch, enables raising the window safety class to the appropriate level.




1 point  
Basic  
protection



2 points  
Basic  
protection



RC1



RC2

SIEGENIA  
brings spaces to life

Rotary mushroom head cam with integrated height adjustment



Though compact, it combines plentiful of advantages: it ensures simpler and perfectly precise installation; self-reliantly equals fitting play tolerances and significantly limits the need to perform adjustment during production, installation and handling; automatically adjusts to changing operating conditions, e.g. temperature; ensures always the optimally set closing system; prevents from time wasting and costly complaints.

Stay system



It enables closing and tilting of balcony windows and doors in an even simpler and more comfortable way: the large closing range on the air latch also allows for smooth, though effortless closing of very wide delicate sashes; positioning in the tilted position by means of a braking bushing; integrated anti-slam protection in the tilted position; lock in the tilted position preventing from incorrect window handling.

Anti-pry latch



Perfect mix of plastic and steel materials, ensuring the so far unreachable low friction level; no-nonsense extension to RC2 thanks to very simple templates / software and identical catch positions also in case of movable posts and higher security levels; attractive design of standard and anti-pry catches.

Balcony latch



During closing of a door a leaf is pulled by means of a latch, resulting in keeping a leaf in the latched position: in the standard version you can adjust the wedging force and friction level is low; in the comfort version door can be unblocked in the tilted position; a frame catch works together with a latch, resulting in no need to use any additional elements.

Corner



The corner with a finger leaf lift and lock of incorrect handle use. Rollers available even at the basic anti-burglary protection level, elegant design of fitting thanks to use of catches in the unified form.

Covered hinge side (optional)



Covered hinges ensure subtle window appearance and seamless sealing ensures perfect thermal and acoustic insulation. Several adjustment options allow to maintain easy sash operation for a long time, while the lower hinge is protected against staining by means of a correctly selected shield.